

R-SERIES

REMINGTON VALVE

Severe Service Ball Valves



R-SERIES

IN-LINE REPAIRABILITY – CHANGING THE GAME!

**CRITICAL SERVICE
FIELD PROVEN
ENGINEERED
SUPPORT
SERVICE**

Engineered Solutions for Severe Service Applications

WHY CHOOSE REMINGTON?

REMINGTON VALVE located in Houston, Texas is a leading manufacturer of Severe Service Ball Valves (SSBV) for the most critical applications in the Refining, Chemical, Petrochemical, Power Generation, Oil & Gas, Mining, Aerospace industries. Decades of Severe Service Ball Valve (SSBV) experience is being utilized in the innovative engineering, manufacturing, cutting edge technology, and field proven designs to help customers like you.

Why Choose **REMINGTON VALVE**:

- Optimized ball valve design and calculations
- 3D Parametric modeling
- Proprietary coating technology
- Automated lapping process laps both sides of ball
- Vacuum testing to validate Class VI shut-off
- All valves built from forgings – no castings

R-SERIES Applications:

- High temperature
- High pressure
- Hot reheat spray
- Main turbine drain
- Soot blower header
- Super-heater spray
- Main steam supply
- Boiler feed pump
- Boiler drains
- Feed water drains
- Above and below seat drains
- Attemperator spray block

R-SERIES (In-line repairability)

Manufactured in Houston, Texas

3 Year Warranty

SIZE

- ½" – 24" (3 piece design)

PRESSURE CLASS

- 150# - 4500#

CENTER SECTION MATERIALS

- A105, F11, F22, F316, F91, F92
All ASME B16.34 materials available

END CONNECTIONS

- SW Standard (BW, HUB, FNPT, RFF, RTJ)
- A105, F11, F22, F316, F91, F92
All ASME B16.34 materials available

SEALING OPTIONS



- Uni-directional (Standard)
- Bi-directional

R-SERIES ADVANTAGES

- Serviceable in-line
- Saves money & time
- Ease of maintenance
- Repairable without cutting the installation welds
- Eliminates further Post Weld Heat Treat (PWHT)

Features and Benefits

- **Ball & Seats:** Both made from the same material to match thermal expansions
- **Lapping:** Automated lapping process laps both sides of the ball to Class VI shut-off
- **Coating:** Proprietary HVOF and Spray & Fused coatings, with cutting edge technology
- **Stem:** Blowout proof stem with surface hardening to prevent galling
- **Articulating Gland Flange:** Spherical engagement allows for equal load distribution on packing
- **Spring:** Allows for thermal expansion and provides a constant mechanical seal
- **Grafoil Packing:** Premium die-formed with Anti-extrusion rings – Live loaded
- **Body Seals:** Three Proprietary (TF) seals allow the body to be removed without cutting the installation welds
- **Vacuum Testing:** To ensure Class VI shut-off prior to installation
- **ASME B16.34:** All valves built to ASME B16.34 requirements

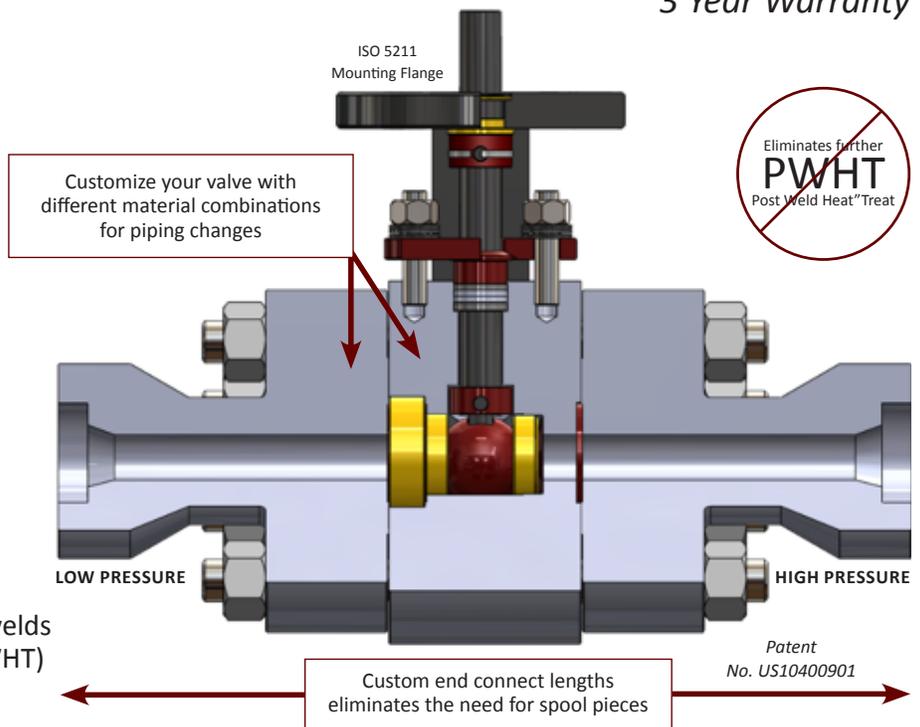


Trim set is vacuum tested to ensure a Class VI shut-off prior to rebuilding the valve

REPLACEABLE TRIM SET

R-SERIES (In-line repairability)


Please refer to the IOM manual before installation.

Patent No. US10400901

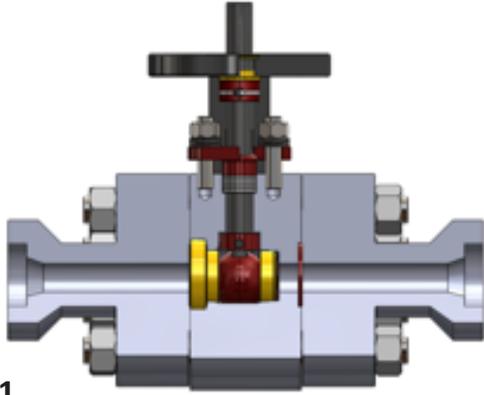


STEP 1

- No more cutting installation welds.

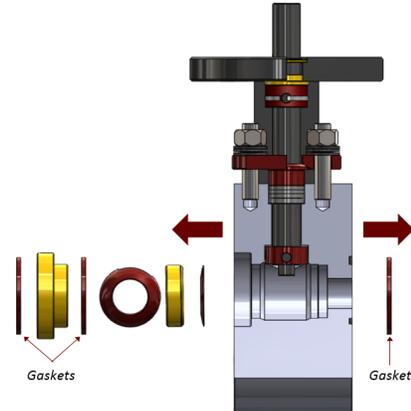


STEP 4

- Remove trim set and gaskets from body.

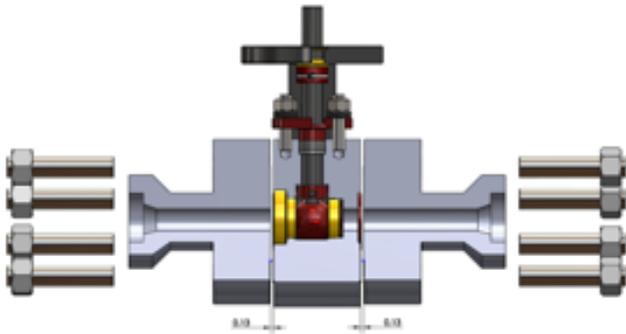


STEP 2

- Remove bolting and spread 1/8" each side.

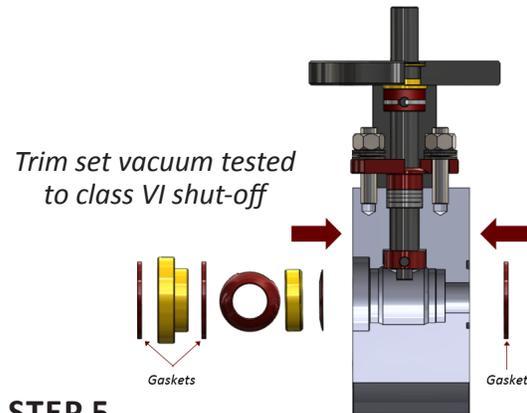


STEP 5

- Install trim set with gaskets in body.

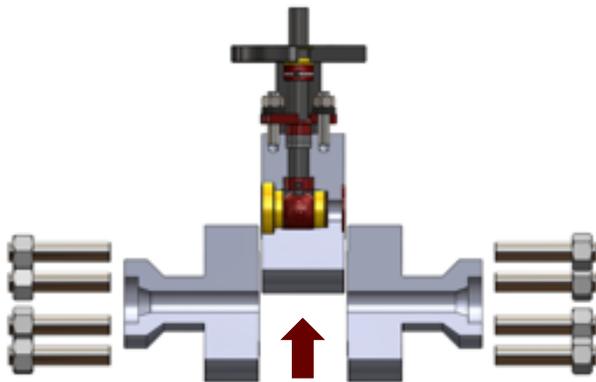

STEP 3

- Lift center section out of end connections.

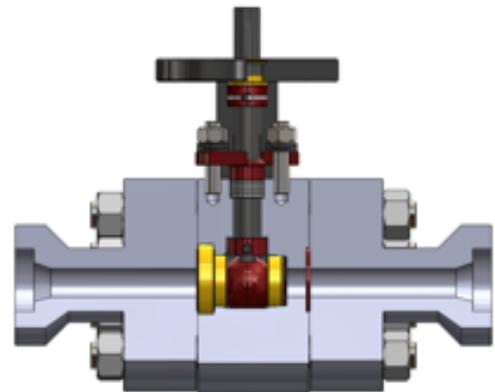

STEP 6

- Install center section and secure bolting.



Custom designs for the toughest applications

REMINGTON VALVE

Manufactured in Houston, Texas

8226 Kerr Street

Houston, TX 77029

CONTACT US:

www.RemingtonValve.com

sales@RemingtonValve.com

O: 832.413.4400 F: 281.974.3595